

EtherCAT Slave Controller with Dual-Core MCU



The AX58400 EtherCAT Slave Controller w/ Dual-Core MCU is a System-in-Package (SiP) product based on the STM32H755 microcontroller from STMicroelectronics. AX58400 is equipped with Dual-Core 32-bit ARM® Cortex®-M7 core with DSP extension runs up to 480 MHz, 32-bit ARM® Cortex®-M4 core with Adaptive Real-Time Accelerator (ST ART Accelerator™) runs up to 240 MHz and EtherCAT Slave Controller (ESC) with two integrated Fast Ethernet PHYs. AX58400 supports AES/TDES/HASH/HMAC hardware cryptographic accelerators, ROP/PCROP/Anti-tamper security techniques, true random number generator, and additional communication interfaces such as 10/100Mbps Ethernet MAC, USB 2.0 OTG, Camera I/F, TFT-LCD Controller, JPEG Codec, SPI/UART/I2C/I2S/SAI/CAN/SDMMC/ADC/DAC/HDMI-CEC/PWM/DFSDM, etc.

The AX58400 is interoperable with all EtherCAT systems with standard EtherCAT protocols such as CoE, FoE, VoE, etc. and is suitable for motor/motion control, digital I/O control, sensors data acquisition, robotics, EtherCAT to IO-Link or Modbus TCP gateway, EtherCAT Junction slave module, EtherCAT communication module, etc. industrial automation fieldbus applications.

Key Features

- A System-in-Package (SiP) product based on ST STM32H755 microcontroller and ASIX EtherCAT slave controller

STM32H755 Microcontroller

Dual-Core ARM® Cortex®-M7 & Cortex®-M4 RISC Cores

- ARM® Cortex®-M7 core with double-precision FPU and L1 cache: 16 Kbytes of data and 16 Kbytes of instruction cache, running up to 480 MHz
- ARM® Cortex®-M4 core with FPU, Adaptive Real-Time Accelerator (ST ART Accelerator™) for internal Flash and external memories, running up to 240 MHz
- Dual bank 2 Mbytes Flash memory and 1 Mbyte SRAM
- Dual mode Quad-SPI memory interface up to 133 MHz

Communication/Analog Interfaces

- 1x 10/100Mbps Ethernet MAC with IEEE 1588
- 2x USB OTG interfaces
- 1x Digital Camera interface
- 4x I2C, 6x SPI, 3x I2S, 4x SAI, 2x CAN
- 4x UART, 4x USART and 1x LPUART
- 1x SPDIFRX interface, 1x SWPMI
- 2x SDMMC host interfaces (SD/SDIO/MMC)
- 1x HDMI-CEC
- 3x 16-bit ADC, 2x 12-bit DAC
- 1x Temperature Sensor
- 2x Ultra-low-power Analog Comparators
- 2x Operational Amplifiers
- 1x DFSDM (Digital Filters for Σ - Δ Modulator)
- Up to 97 GPIOs with interrupt capability

Graphics

- TFT-LCD controller up to XGA resolution
- Hardware JPEG Codec
- ST Chrom-ART graphical hardware Accelerator™ (DMA2D) to reduce CPU loading

Block Diagram



EtherCAT®

ASIX Electronics Corporation

4F, No. 8, Hsin Ann Road, Hsinchu Science Park, Hsinchu, 30078, Taiwan

TEL: +886-3-5799500 FAX: +886-3-5799558

Email: sales@asix.com.tw

https://www.asix.com.tw/





ASIX

AX58400 Product Brief

■ Timers and Watchdog

- 1x high-resolution timer (2.1 ns max resolution)
- 2x 32-bit timers with up to 4 IC/OC/PWM or pulse counter and quadrature (incremental) encoder input (up to 240 MHz)
- 2x 16-bit advanced motor control timers (up to 240 MHz)
- 10x 16-bit general-purpose timers (up to 240 MHz)
- 5x 16-bit low-power timers (up to 240 MHz)
- 2x independent watchdogs, 2x window watchdogs
- 2x SysTick timers
- RTC with sub-second accuracy and hardware calendar

■ Clock Management

- Internal oscillators: 64 MHz HSI, 48 MHz HSI48, 4 MHz CSI, 32 KHz LSI
- External oscillators: 4MHz~48 MHz HSE, 32.768 KHz LSE
- 3x PLLs with Fractional mode

■ Low-power Consumption

- VBAT battery operating mode with charging capability
- CPU and domain power state monitoring pins
- 2.95 μ A in Standby mode (Backup SRAM OFF, RTC/LSE ON)

- High power-efficiency SMPS step-down converter regulator to directly supply VCORE and/or external circuitry
- Low-power modes: Sleep, Stop, Standby and VBAT supporting battery charging

■ Security and Cryptographic Accelerator

- Return-Oriented Programming (ROP), Proprietary Code Read-Out Protection (PC-ROP), active anti-tamper
- AES-128/192/256, Triple-DES, HASH (MD5/SHA-1/SHA-2), HMAC hardware cryptographic accelerators
- True Random Number Generator (RNG)

■ 96-bit Unique Identifier (UID)

● EtherCAT Slave Controller (ESC) Sub-system


- 2 integrated Fast Ethernet PHYs
- 3rd Fast Ethernet MII Port for flexible EtherCAT network configuration
- 9KB DPRAM, 8 FMMUs and 8 Sync Managers
- 64-bit Distributed Clock

● 225LD EHS-TFBGA 13x13 mm, 0.8-mm pitch, RoHS Compliant Package

● Operating Temperature Range: -40 to +85°C

Target Applications

- Motor/Motion Control
- Digital I/O Control
- Robotics
- Sensors Data Acquisition
- EtherCAT to IO-Link Gateway
- EtherCAT Junction Slave Module
- Communication Module
- Operator HMI Interfaces

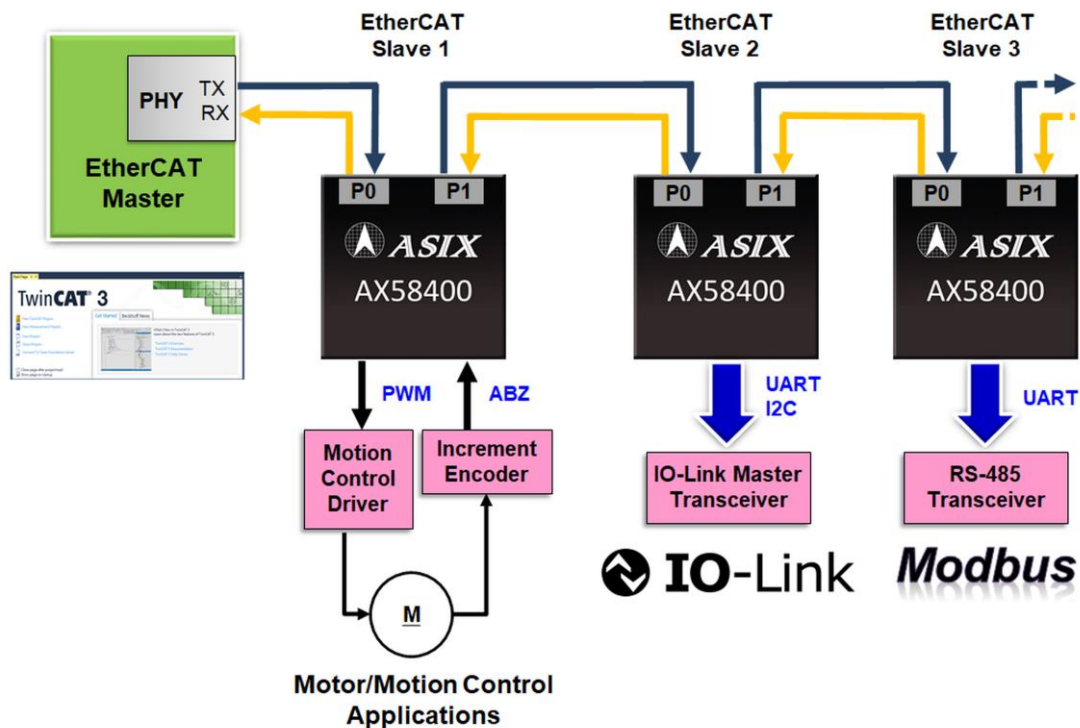

Motor/Motion Control Applications

EtherCAT®

✚ EtherCAT® is a registered trademark and patented technology, licensed by Beckhoff Automation GmbH, Germany.
✚ STM32, ART Accelerator™, Chrom-ART graphical hardware Accelerator™ are registered trademarks and patented technologies, licensed by STMicroelectronics International N.V. Copyright © 2019 STMicroelectronics – All rights reserved for STM32H755 microcontroller.

✚ Arm® and Cortex® are registered trademarks and patented technologies, licensed by Arm Limited (or its subsidiaries).

ASIX Electronics Corporation

4F, No. 8, Hsin Ann Road, Hsinchu Science Park, Hsinchu, 30078, Taiwan

TEL: +886-3-5799500 FAX: +886-3-5799558

Email: sales@asix.com.tw

https://www.asix.com.tw/



官方微信



官方網站